


Откройте веб-браузер и введите IP -адрес вашего устройства в адресной строке (по умолчанию 192.168.0.1), нажмите **Enter** .

**Login:** admin


**Password:** admin или (оставьте поле пустым)

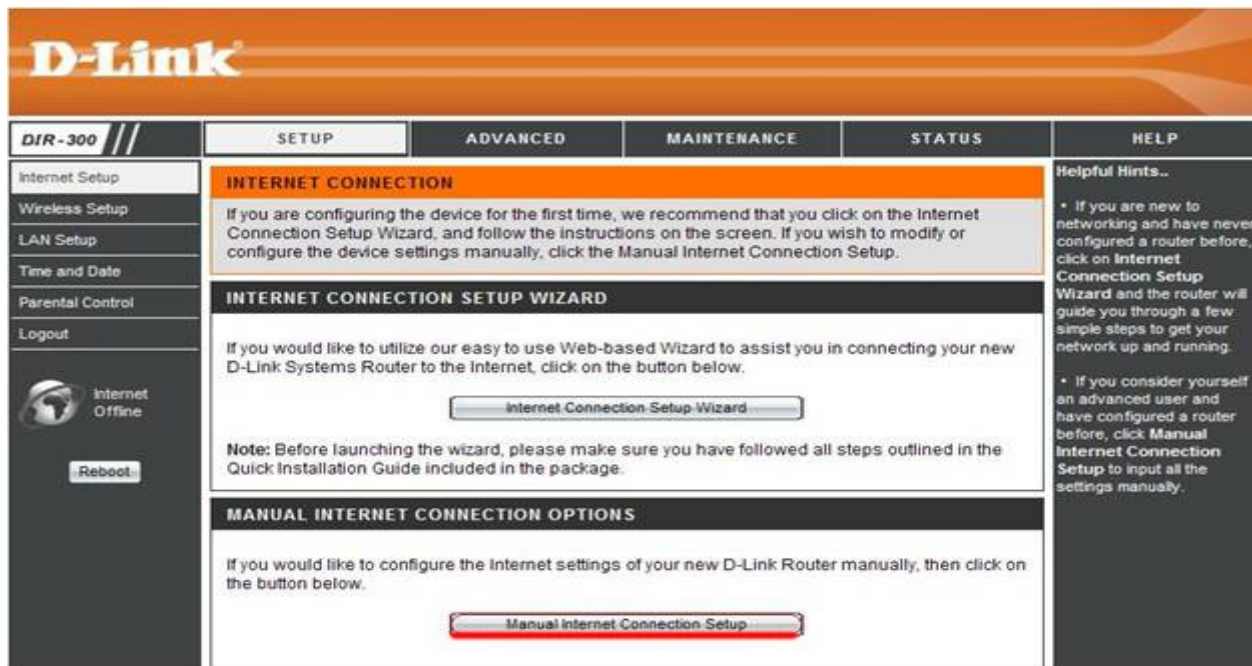

На вкладке **Setup**, выбираете вкладку **Internet Setup**.

Нажимаете кнопку **Manual Internet Connection Setup**.

1. В поле **My Internet Connection is:** выберите **Russia PPPoE Dual Access**. Выбираете подключение с динамическим назначением адреса- **Dynamic PPPoE**.

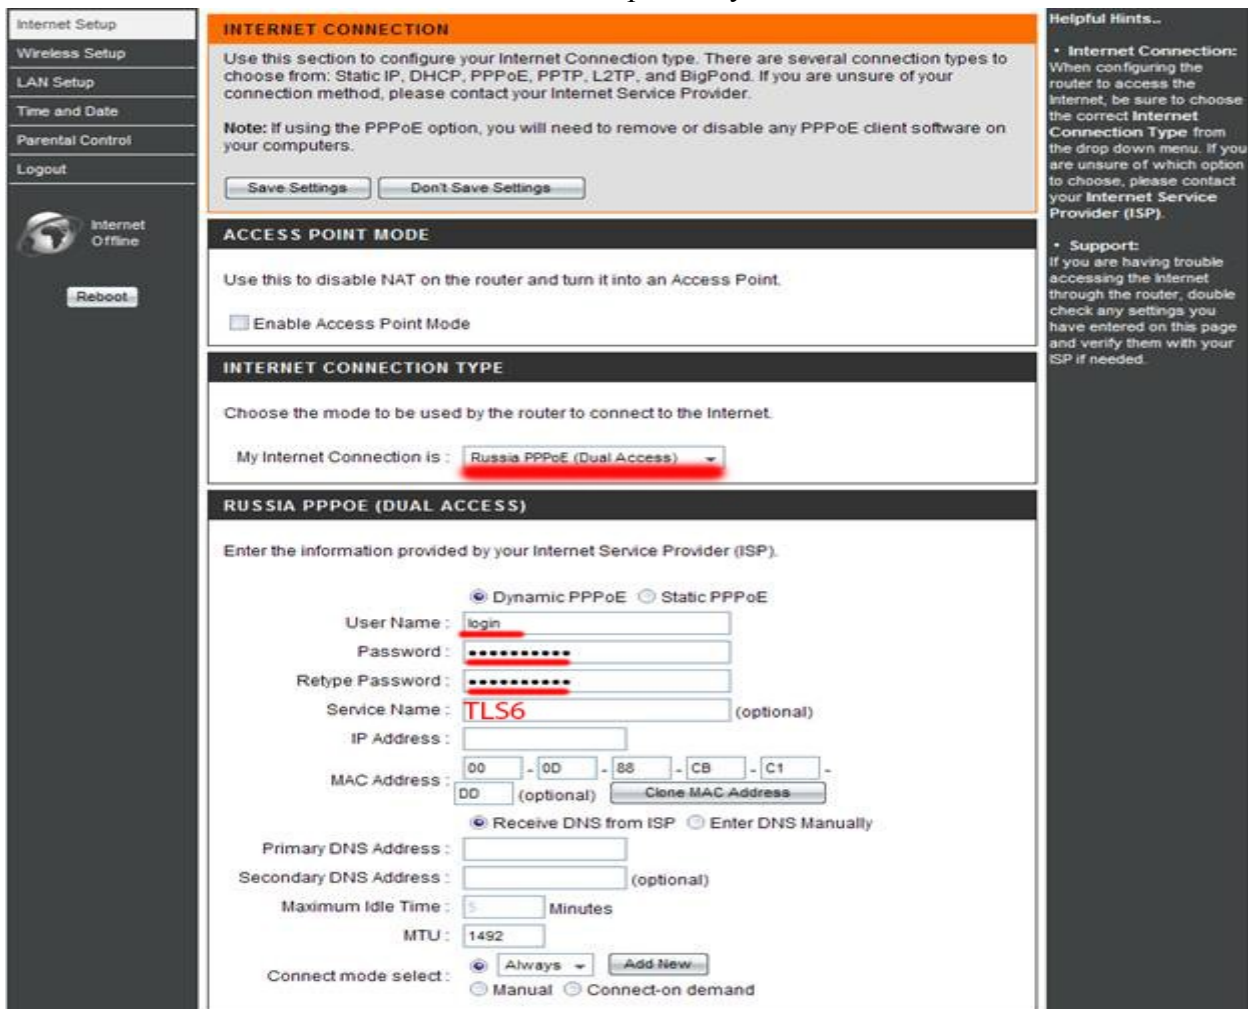

2. User Name – имя пользователя для авторизации в сети.
3. Password – пароль для авторизации в сети.  
Retype Password – повторите пароль для авторизации в сети.
4. Service Name – прописываем TLS6.
- 5.затем – сохранить настройки «Save Settings».

Настройка Wi-Fi

Выбираем «SETUP» → «Wireless Setup» → «Manual Wireless Connection Setup».

Product Page : DIR-300		Hardware Version : B1 Firmware Version : 2.05			
<b>D-Link</b>					
<b>DIR-300</b> //	<b>SETUP</b>	<b>ADVANCED</b>	<b>MAINTENANCE</b>	<b>STATUS</b>	<b>HELP</b>
Internet Setup	<b>WIRELESS CONNECTION</b>				<b>Helpful Hints..</b>  <ul style="list-style-type: none"> <li>If you are new to wireless networking and have never configured a wireless router before, click on <b>Wireless Connection Setup Wizard</b> and the router will guide you through a few simple steps to get your wireless network up and running.</li> <li>If you consider yourself an advanced user and have configured a wireless router before, click <b>Manual Wireless Connection Setup</b> to input all the settings manually.</li> </ul>
Wireless Setup	<p>There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup Wizard or you can manually configure the connection.</p> <p><b>Please note that changes made in this section will also need to be duplicated on your wireless clients and PCs.</b></p>				
LAN Setup	<b>WIRELESS CONNECTION SETUP WIZARD</b>				
Time and Date	<p>If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Wireless Router to the Internet, click on the button below.</p> <p style="text-align: center;"><a href="#">Wireless Connection Setup Wizard</a></p> <p><b>Note:</b> Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p>				
Parental Control	<b>MANUAL WIRELESS CONNECTION OPTIONS</b>				
Logout	<p>If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.</p> <p style="text-align: center;"><a href="#">Manual Wireless Connection Setup</a></p>				

В Wireless Network Name ввести название вашего Wi-Fi. В появившемся окне выбираем «Security Mode» → «Enable WPA/WPA2 Wireless Security (enhanced)» Ключ беспроводной сети «Network key» нужно ввести самостоятельно (от 8 до 63 символов), затем – сохранить настройки «Save Settings».

Internet Setup

Wireless Setup

LAN Setup

Time and Date

Parental Control

Logout

**WIRELESS NETWORK**

Use this section to configure the wireless settings for your D-Link router. Please note that changes made in this section may also need to be duplicated on your wireless client.

To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2.

**WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)**Enable : Current PIN : **15365866**Wi-Fi Protected Status : **Enabled / Not Configured****WIRELESS NETWORK SETTINGS**Enable Wireless :  Always  Wireless Network Name :  (Also called the SSID)Enable Auto Channel Selection : Wireless Channel : Transmission Rate :  (Mbit/s)WMM Enable :  (Wireless QoS)Enable Hidden Wireless :  (Also called the SSID Broadcast)**WIRELESS SECURITY MODE**Security Mode : **WPA/WPA2**

WPA/WPA2 requires stations to use high grade encryption and authentication.

Cipher Type : PSK / EAP : Network Key :   
(8~63 ASCII or 64 HEX)